


SERVICE CONNECTION FOR SHALLOW SEWERS
(LESS THAN 15 FEET)

NOT TO SCALE

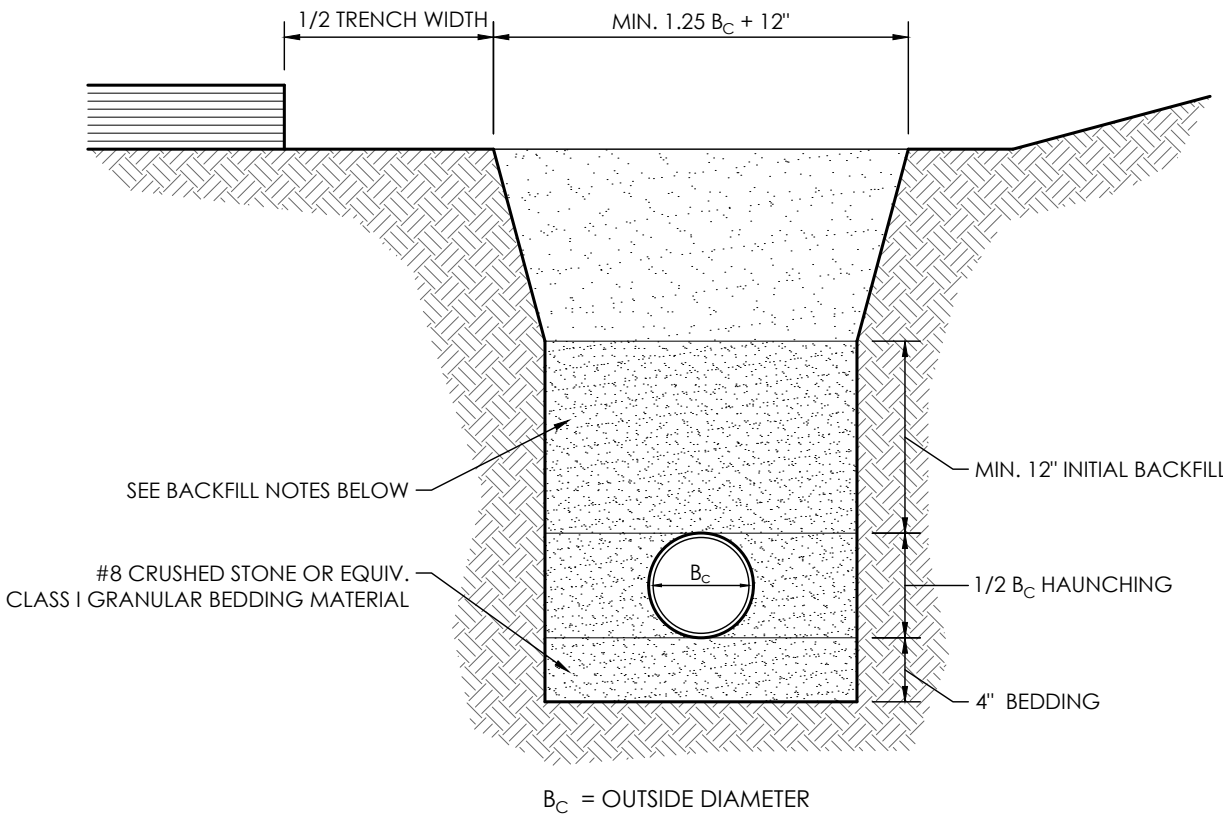


BACKFILL NOTES:

- WHERE PIPE IS DIRECTLY BENEATH OR WITHIN 5 FEET OF PAVEMENT AREAS, FINAL BACKFILL SHOULD CONSIST OF COMPACTED #53 AGGREGATE PLACED FROM 12" ABOVE THE TOP OF PIPE TO THE PAVEMENT BASE.
- OUTSIDE PAVEMENT AREAS, NATIVE MATERIAL SHALL BE USED AND COMPACTED TO PREVENT SETTLEMENT. NATIVE MATERIAL TO BE CLEAN FILL MATERIAL AND FREE OF ROCKS 6" IN DIAMETER AND LARGER.
- ALL PIPE SYSTEMS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D231, "STANDARD PRACTICE FOR UNDERGROUND INSTALLATION OF THERMOPLASTIC PIPE FOR SEWERS AND OTHER GRAVITY FLOW APPLICATIONS", LATEST EDITION.
- ALL BEDDING & INITIAL BACKFILL SHALL BE INSTALLED IN 6" TO 12" BALANCED LIFTS. BEDDING MATERIAL SHALL BE HAND PLACED AROUND THE HAUNCH & SIDES OF THE PIPE TO ENSURE PROPER COMPACTION & COMPLETE FILING OF ALL VOIDS.

FLEXIBLE PIPE BEDDING DETAIL

NOT TO SCALE

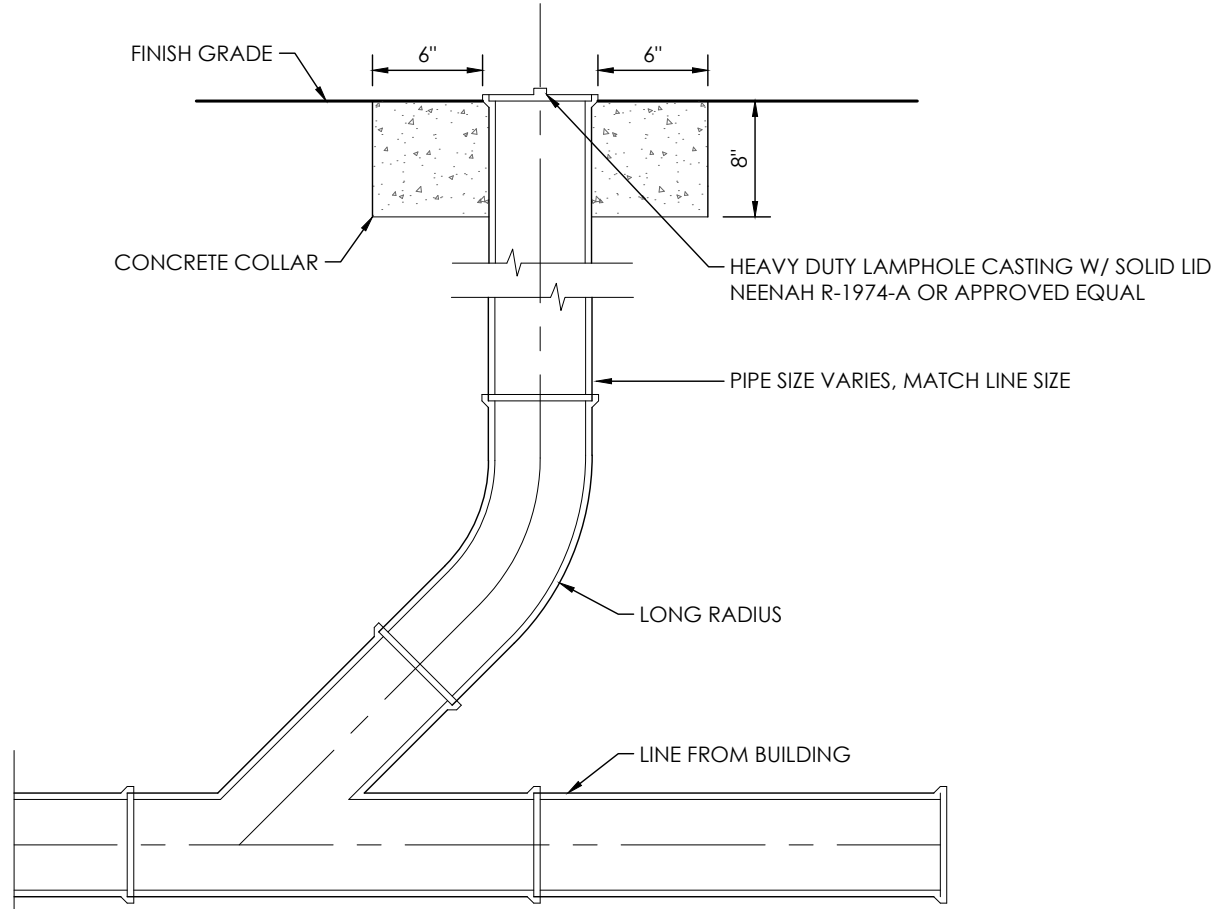

HEAVY DUTY CLEANOUT DETAIL

NOT TO SCALE

REVISION BLOCK



Michael Thompson

DATE
10/22/2021

DRAWN BY
KPB

CHECKED BY
TLP

HAMILTON
DESIGNS

A LIMITED LIABILITY COMPANY

11 Municipal Drive, Suite 300
Fishers, Indiana 46038
P. (317) 570-8800
www.hamilton-designs.com

CONSTRUCTION PLANS FOR:

ARBY'S | HEBER SPRINGS

1432 Heber Springs Road
Heber Springs, Arkansas 72543

RB AMERICAN GROUP, LLC

4200 Oak Tree Blvd., Suite 250
Independence, Ohio 44131

PROJECT NO.
2021-0122

DATE
10/22/2021

SCALE

SHEET NAME
UTILITY
DETAILS

SHEET NO.

CU-501